



Information booklet


for

machine *BV*

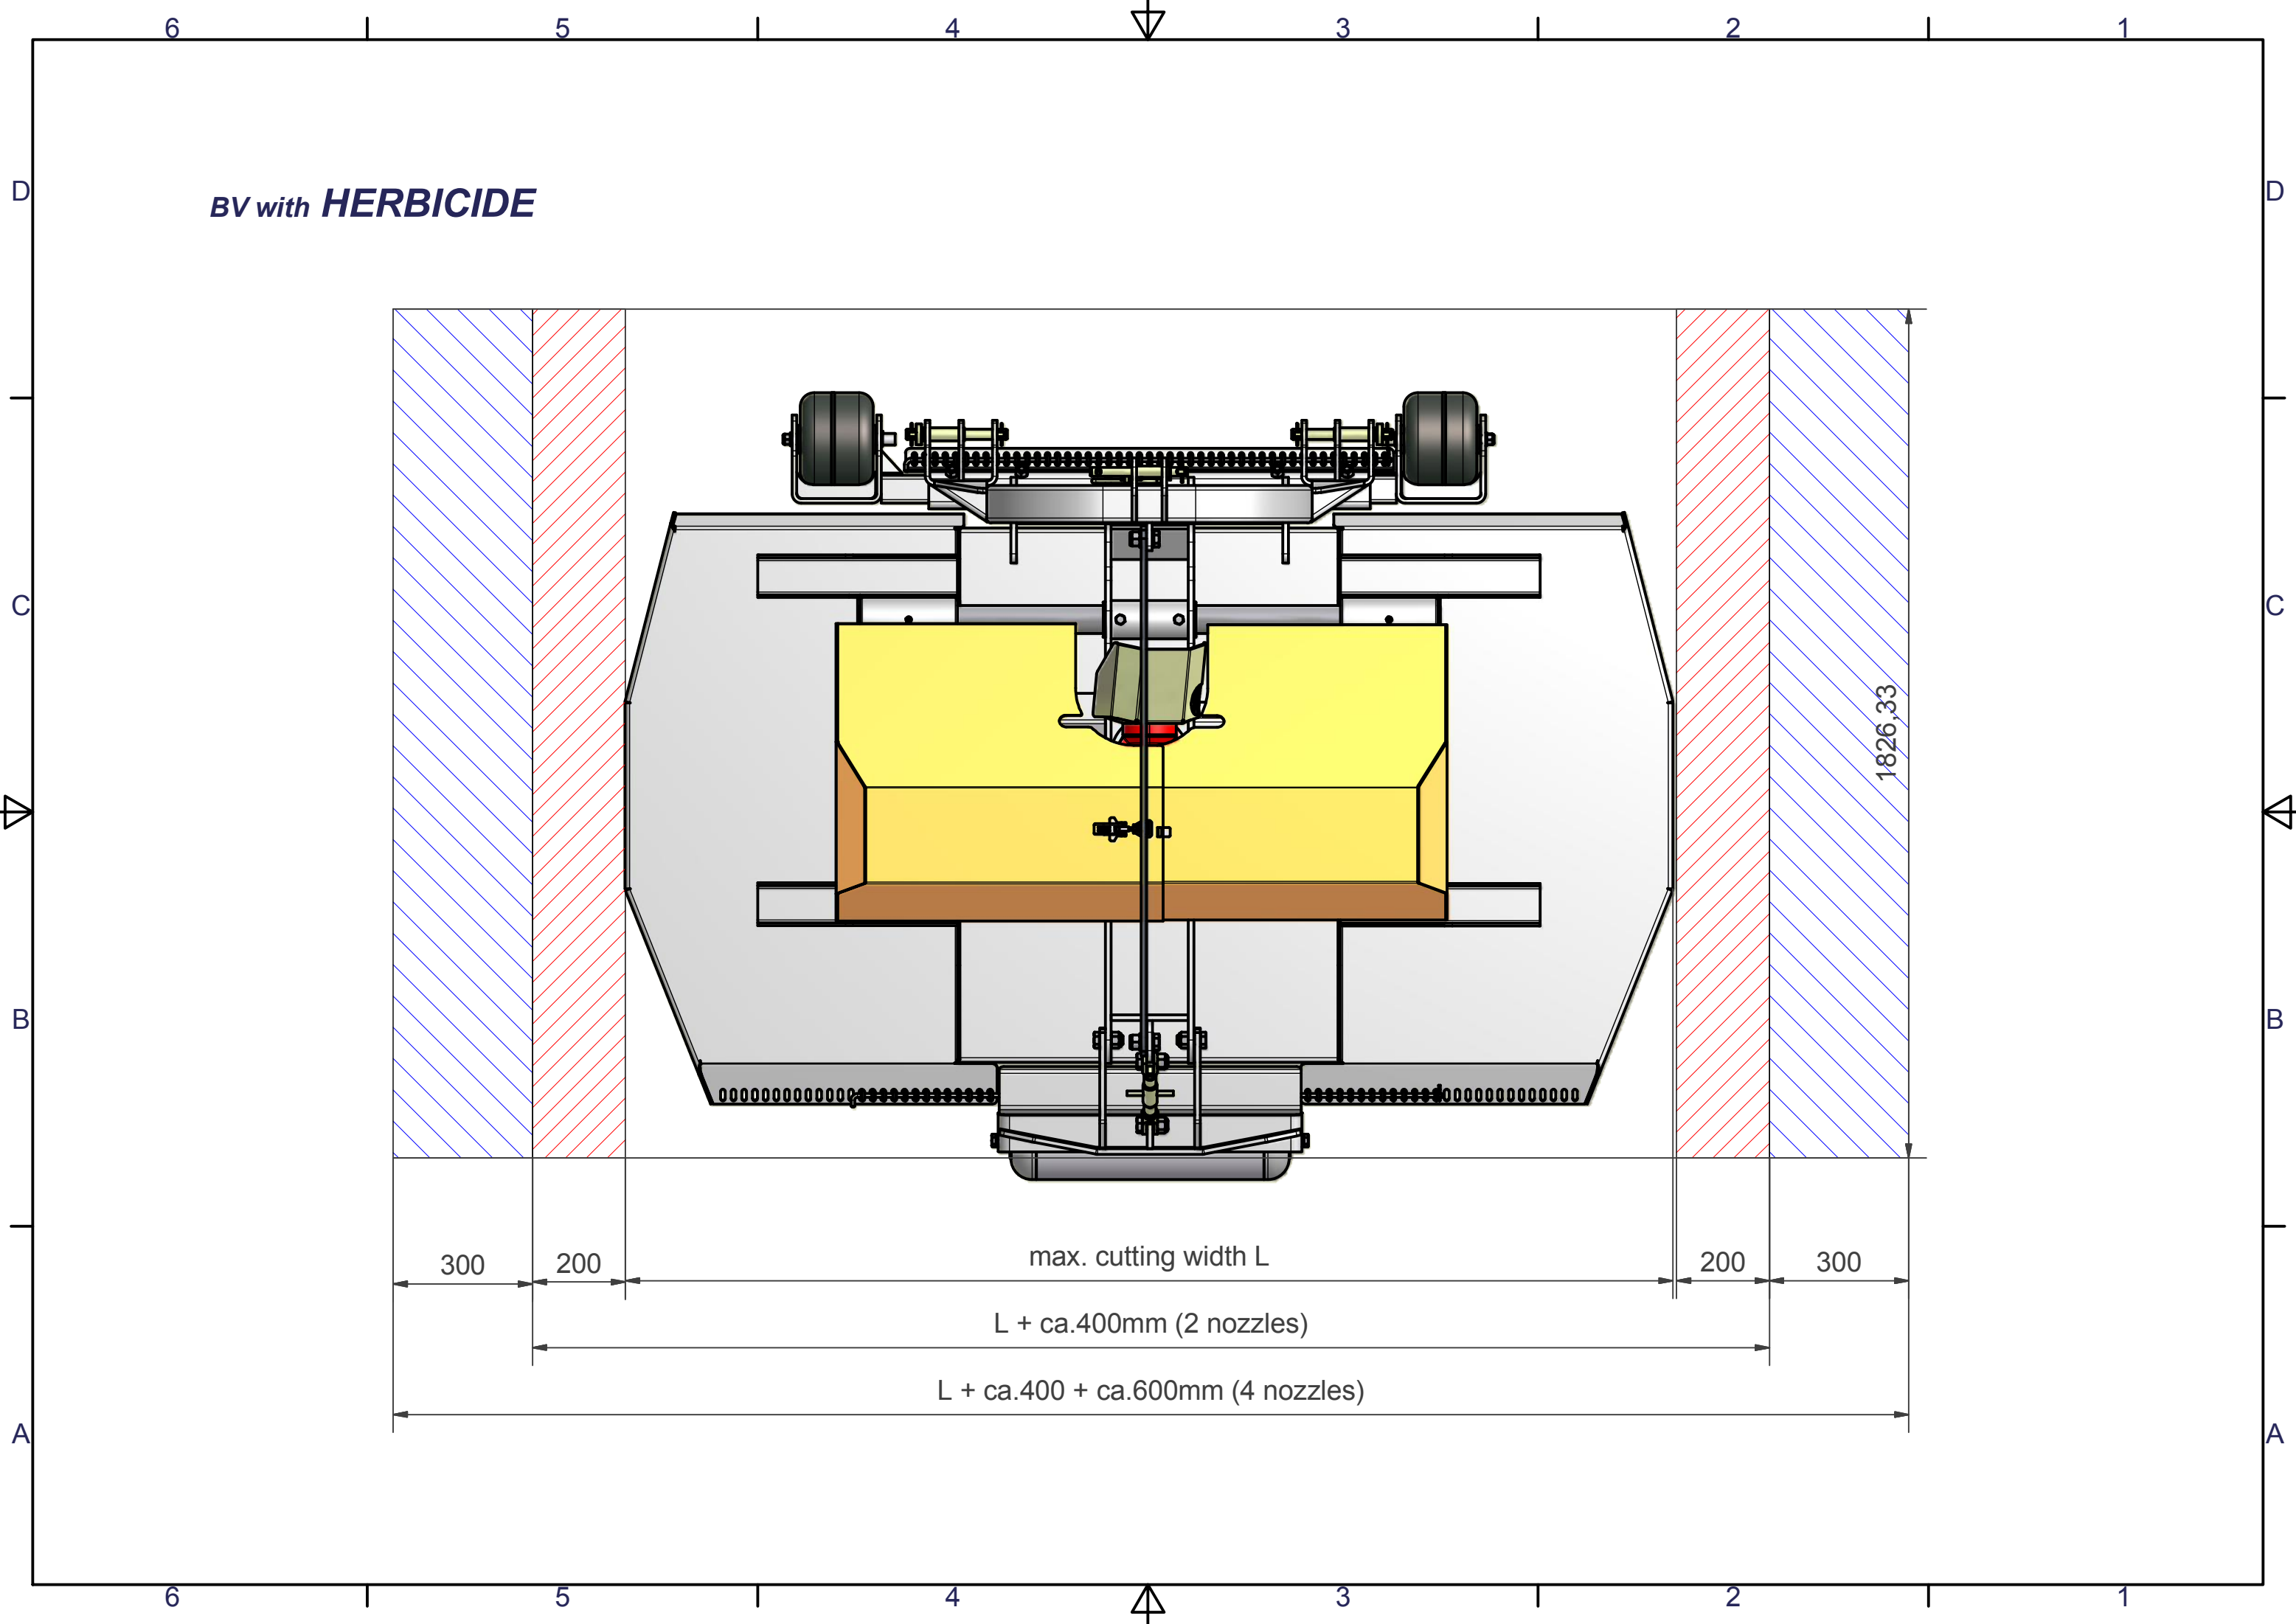

Power transmission elements

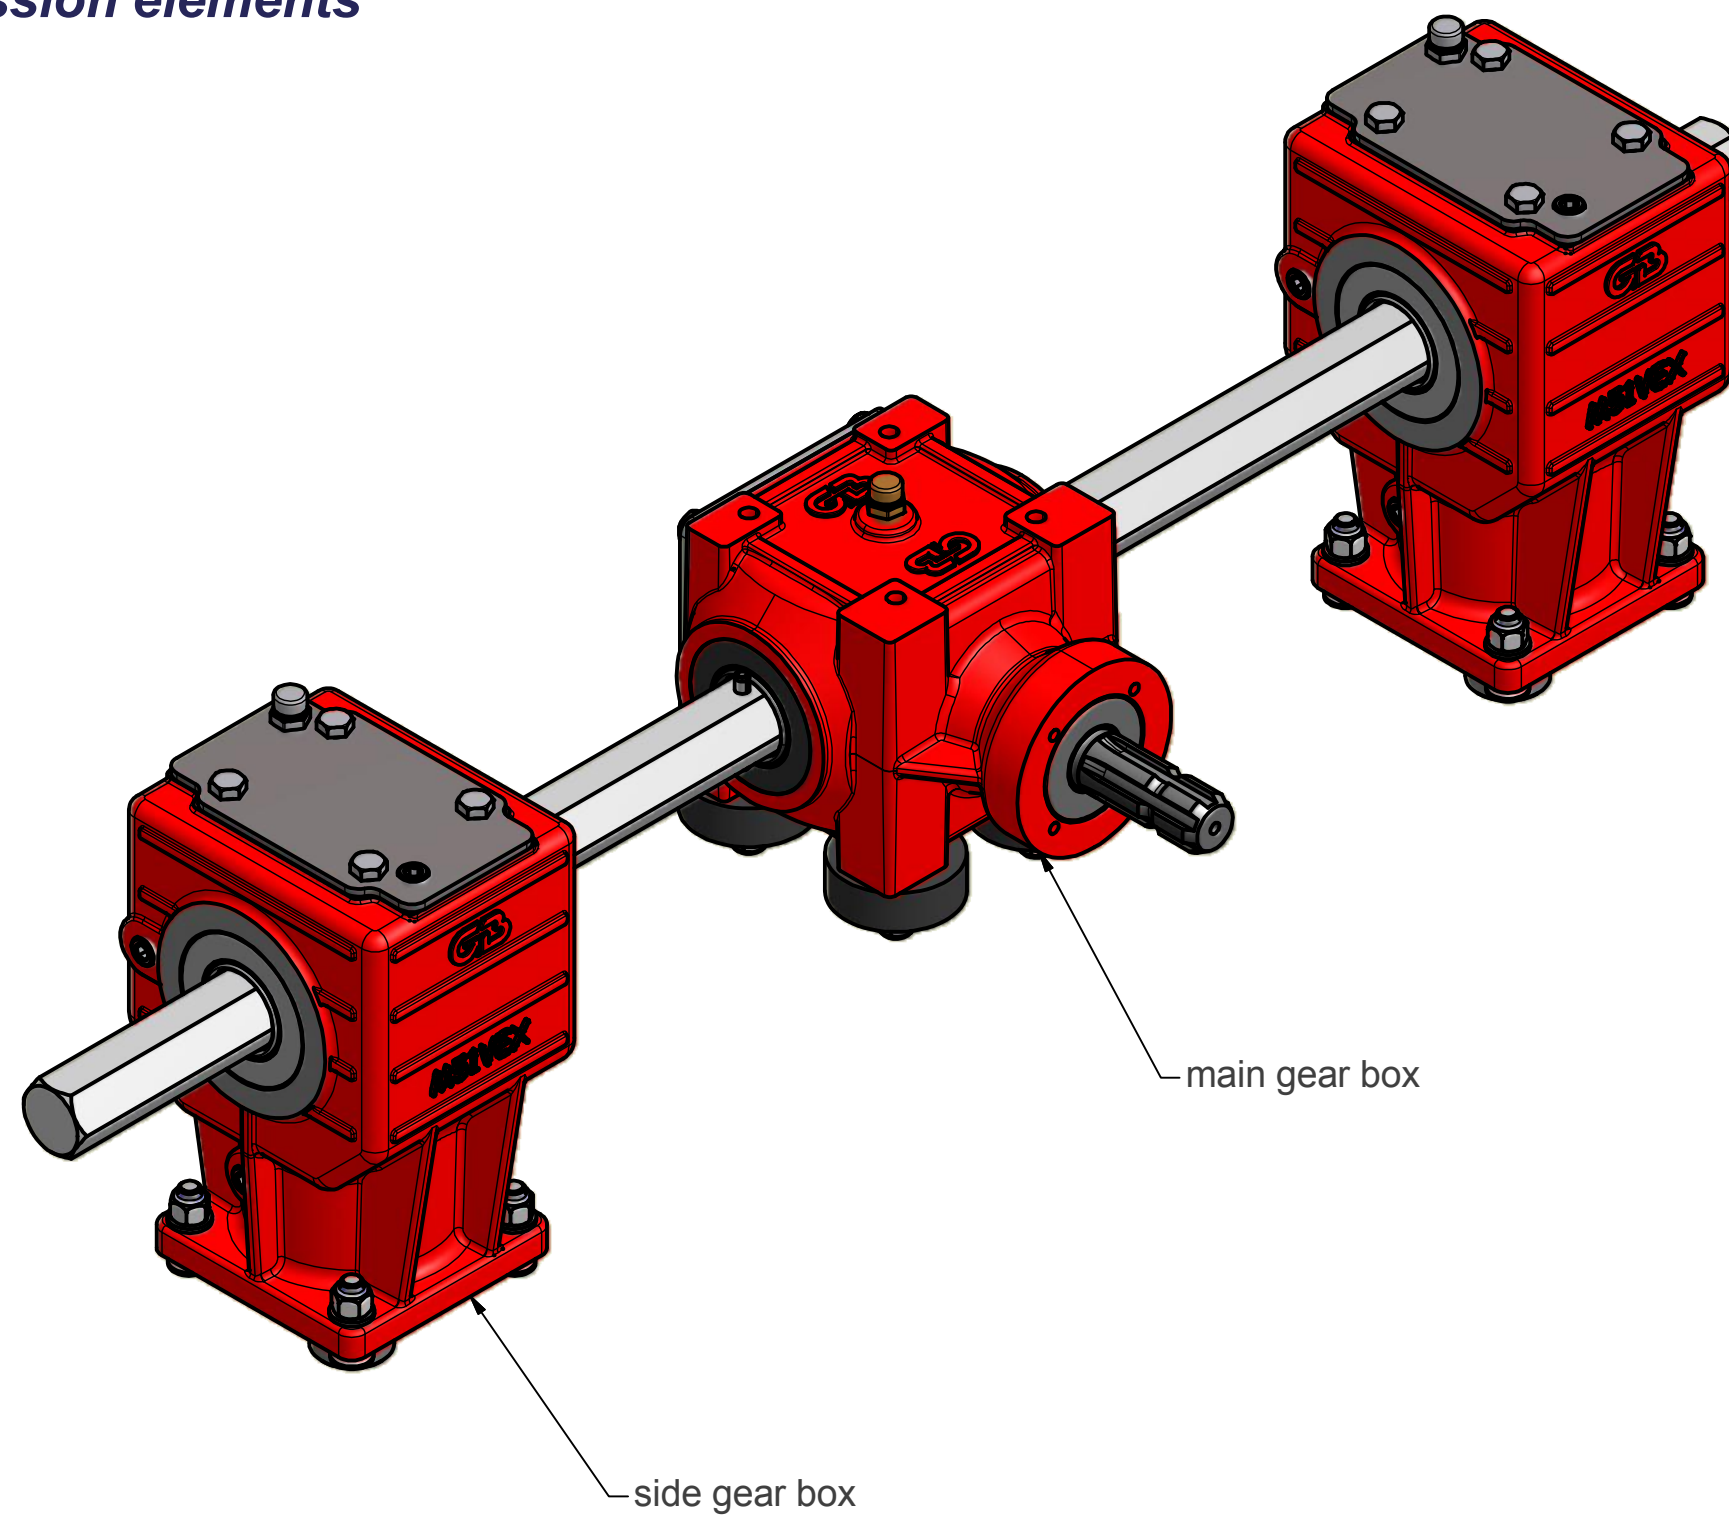

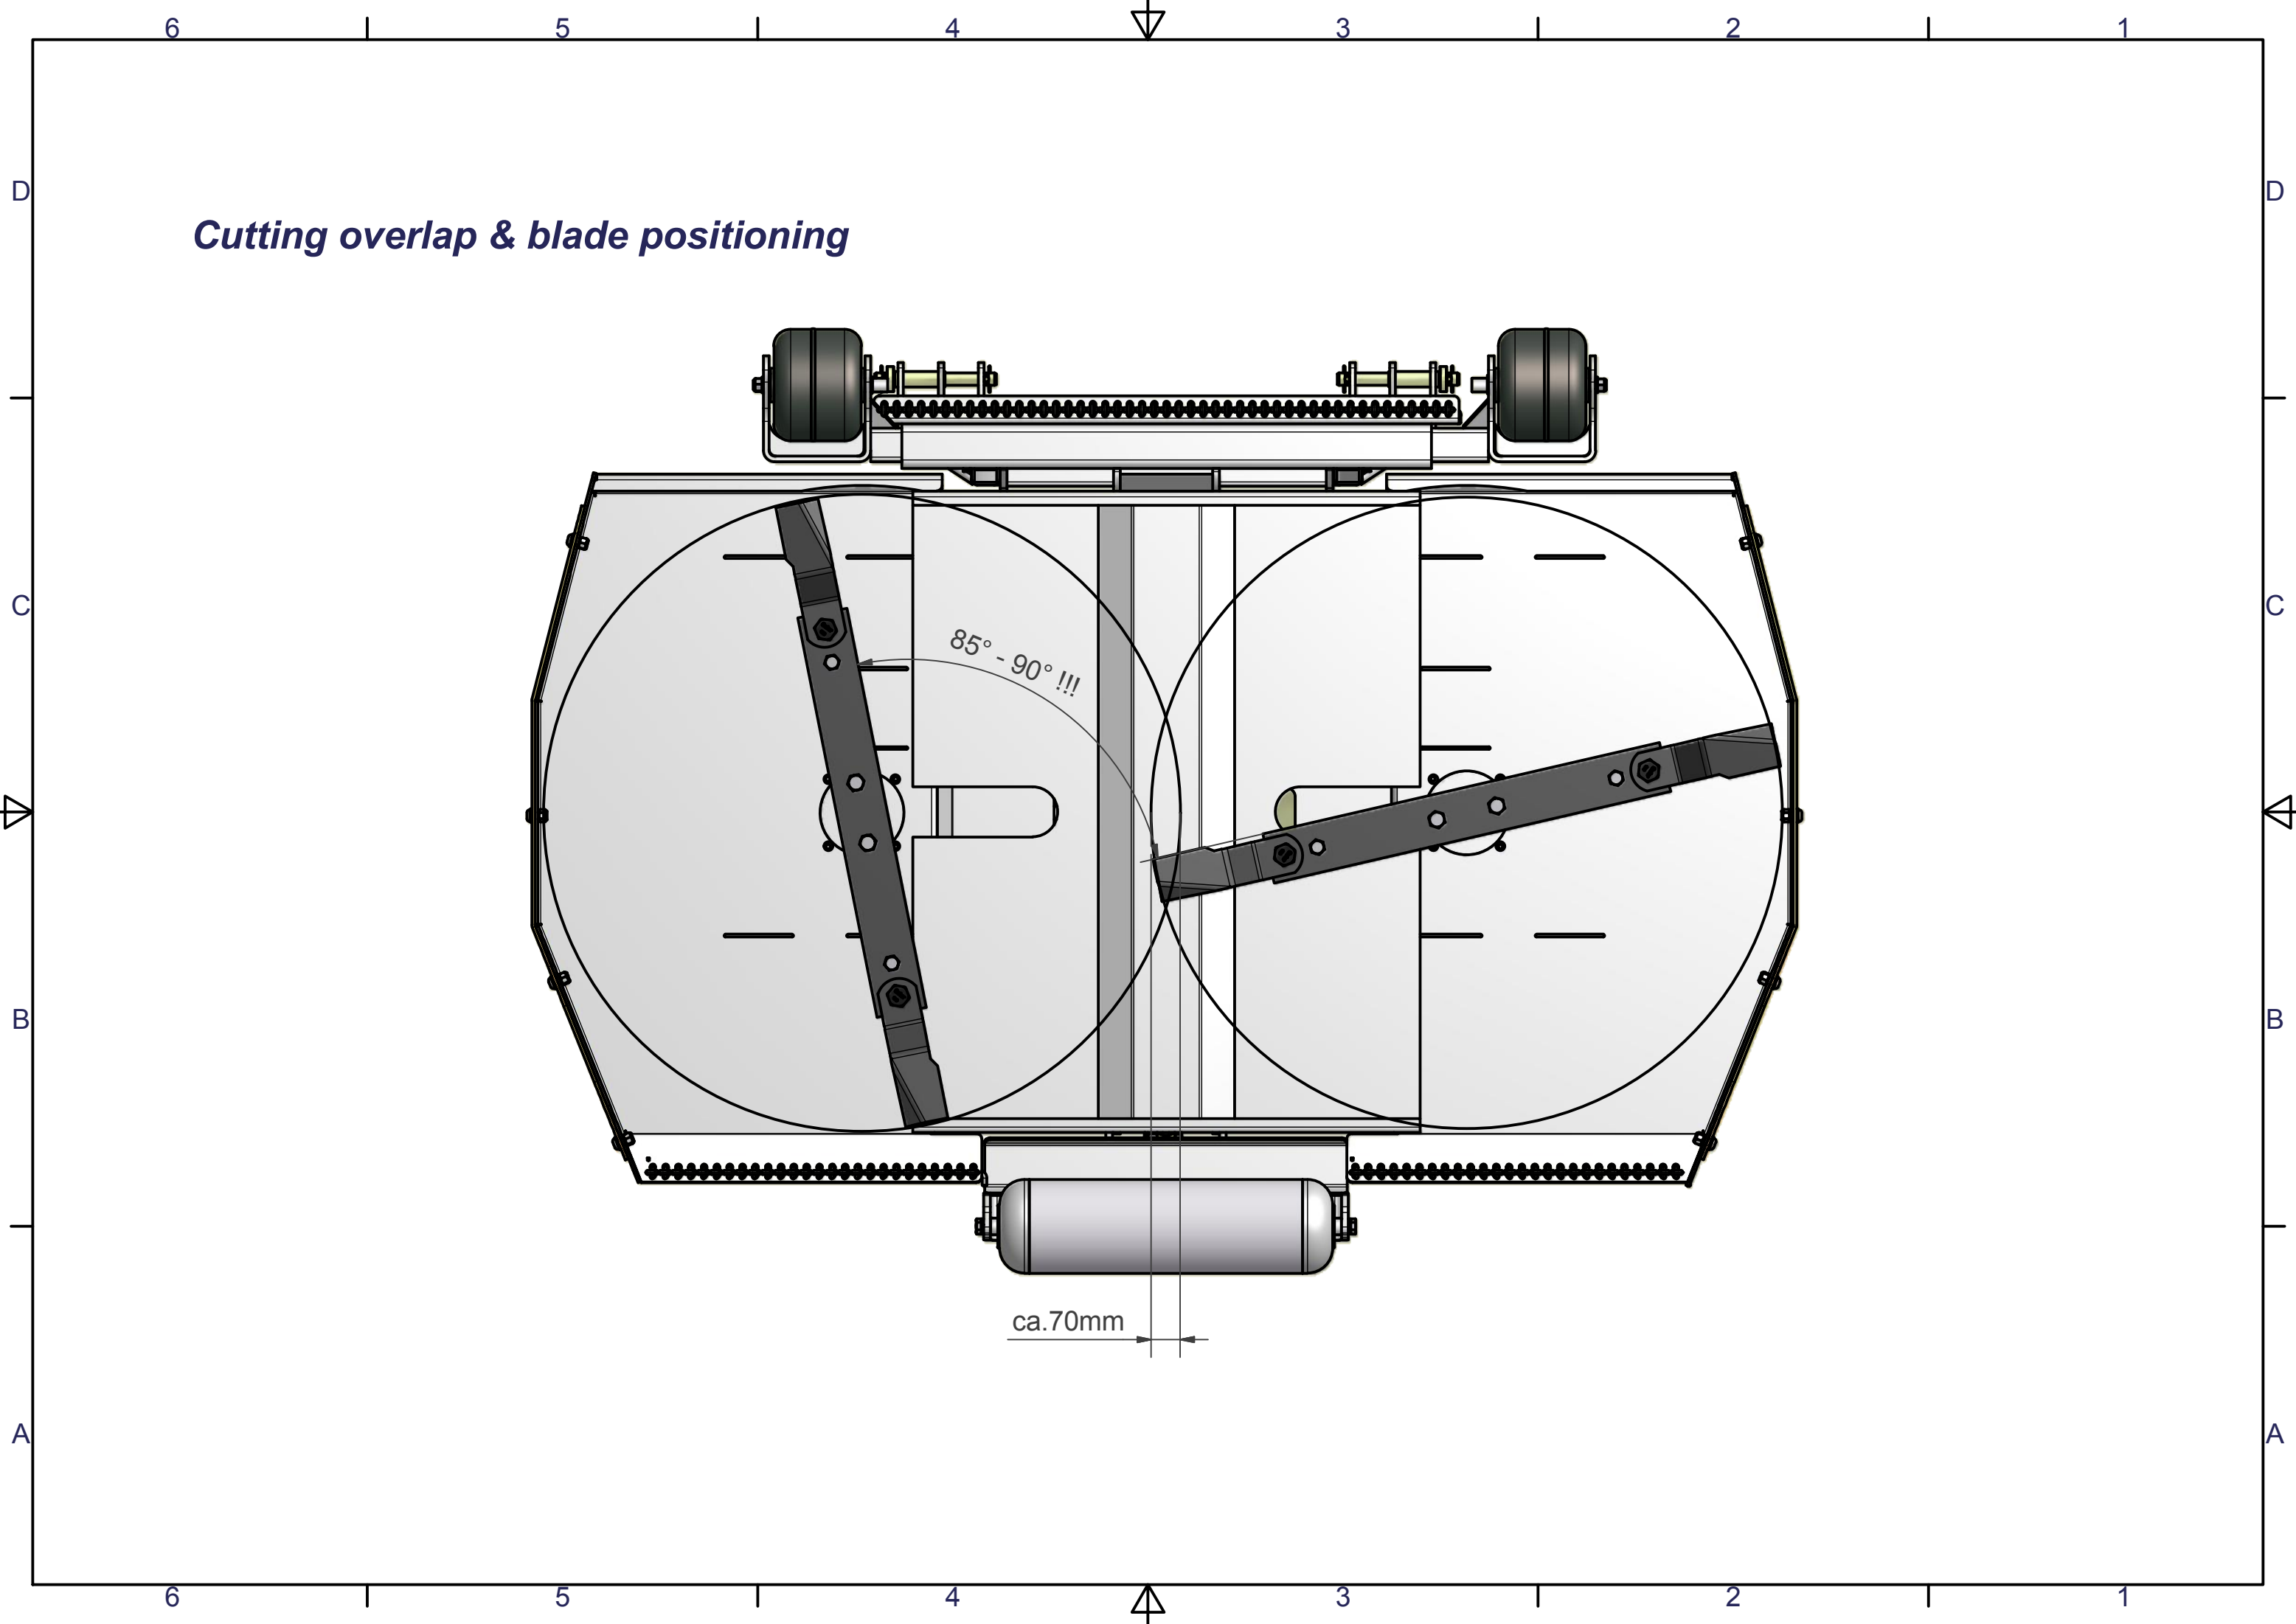

Cutting overlap & blade positioning


ca. 70mm


85° - 90° !!!

***Cutting hight adjustment
(4-7cm)***

Thread spindle for rear
roller adjustment

3 positions for hight
adjustment in front

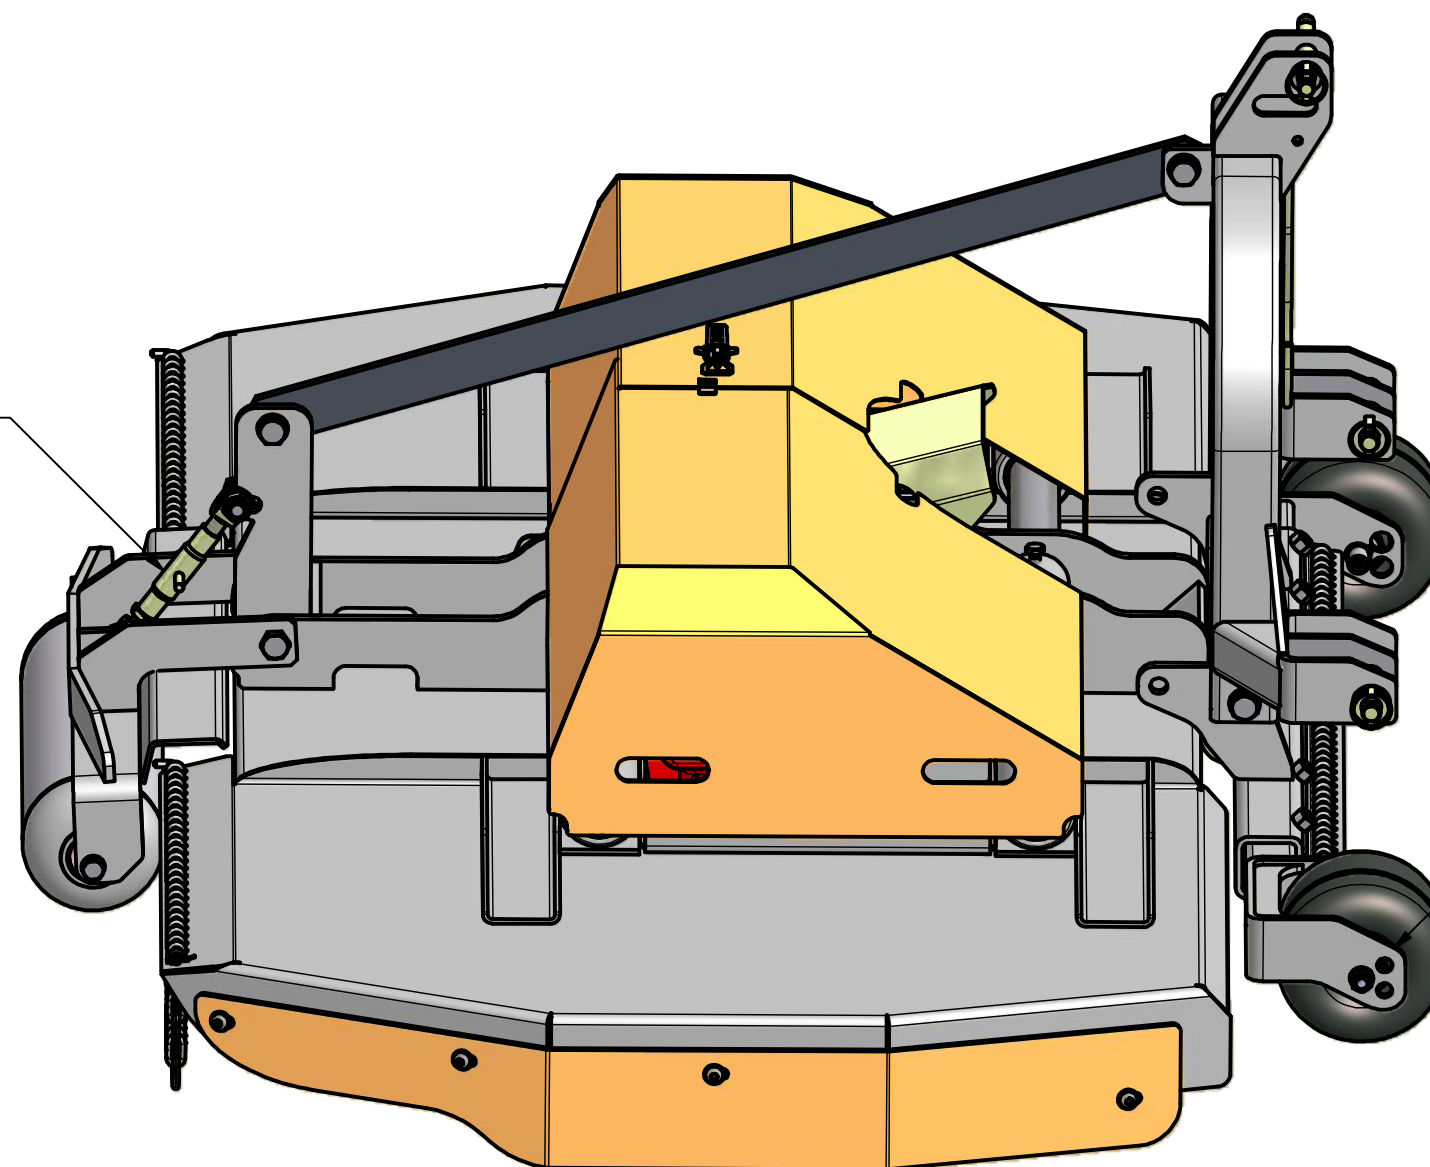


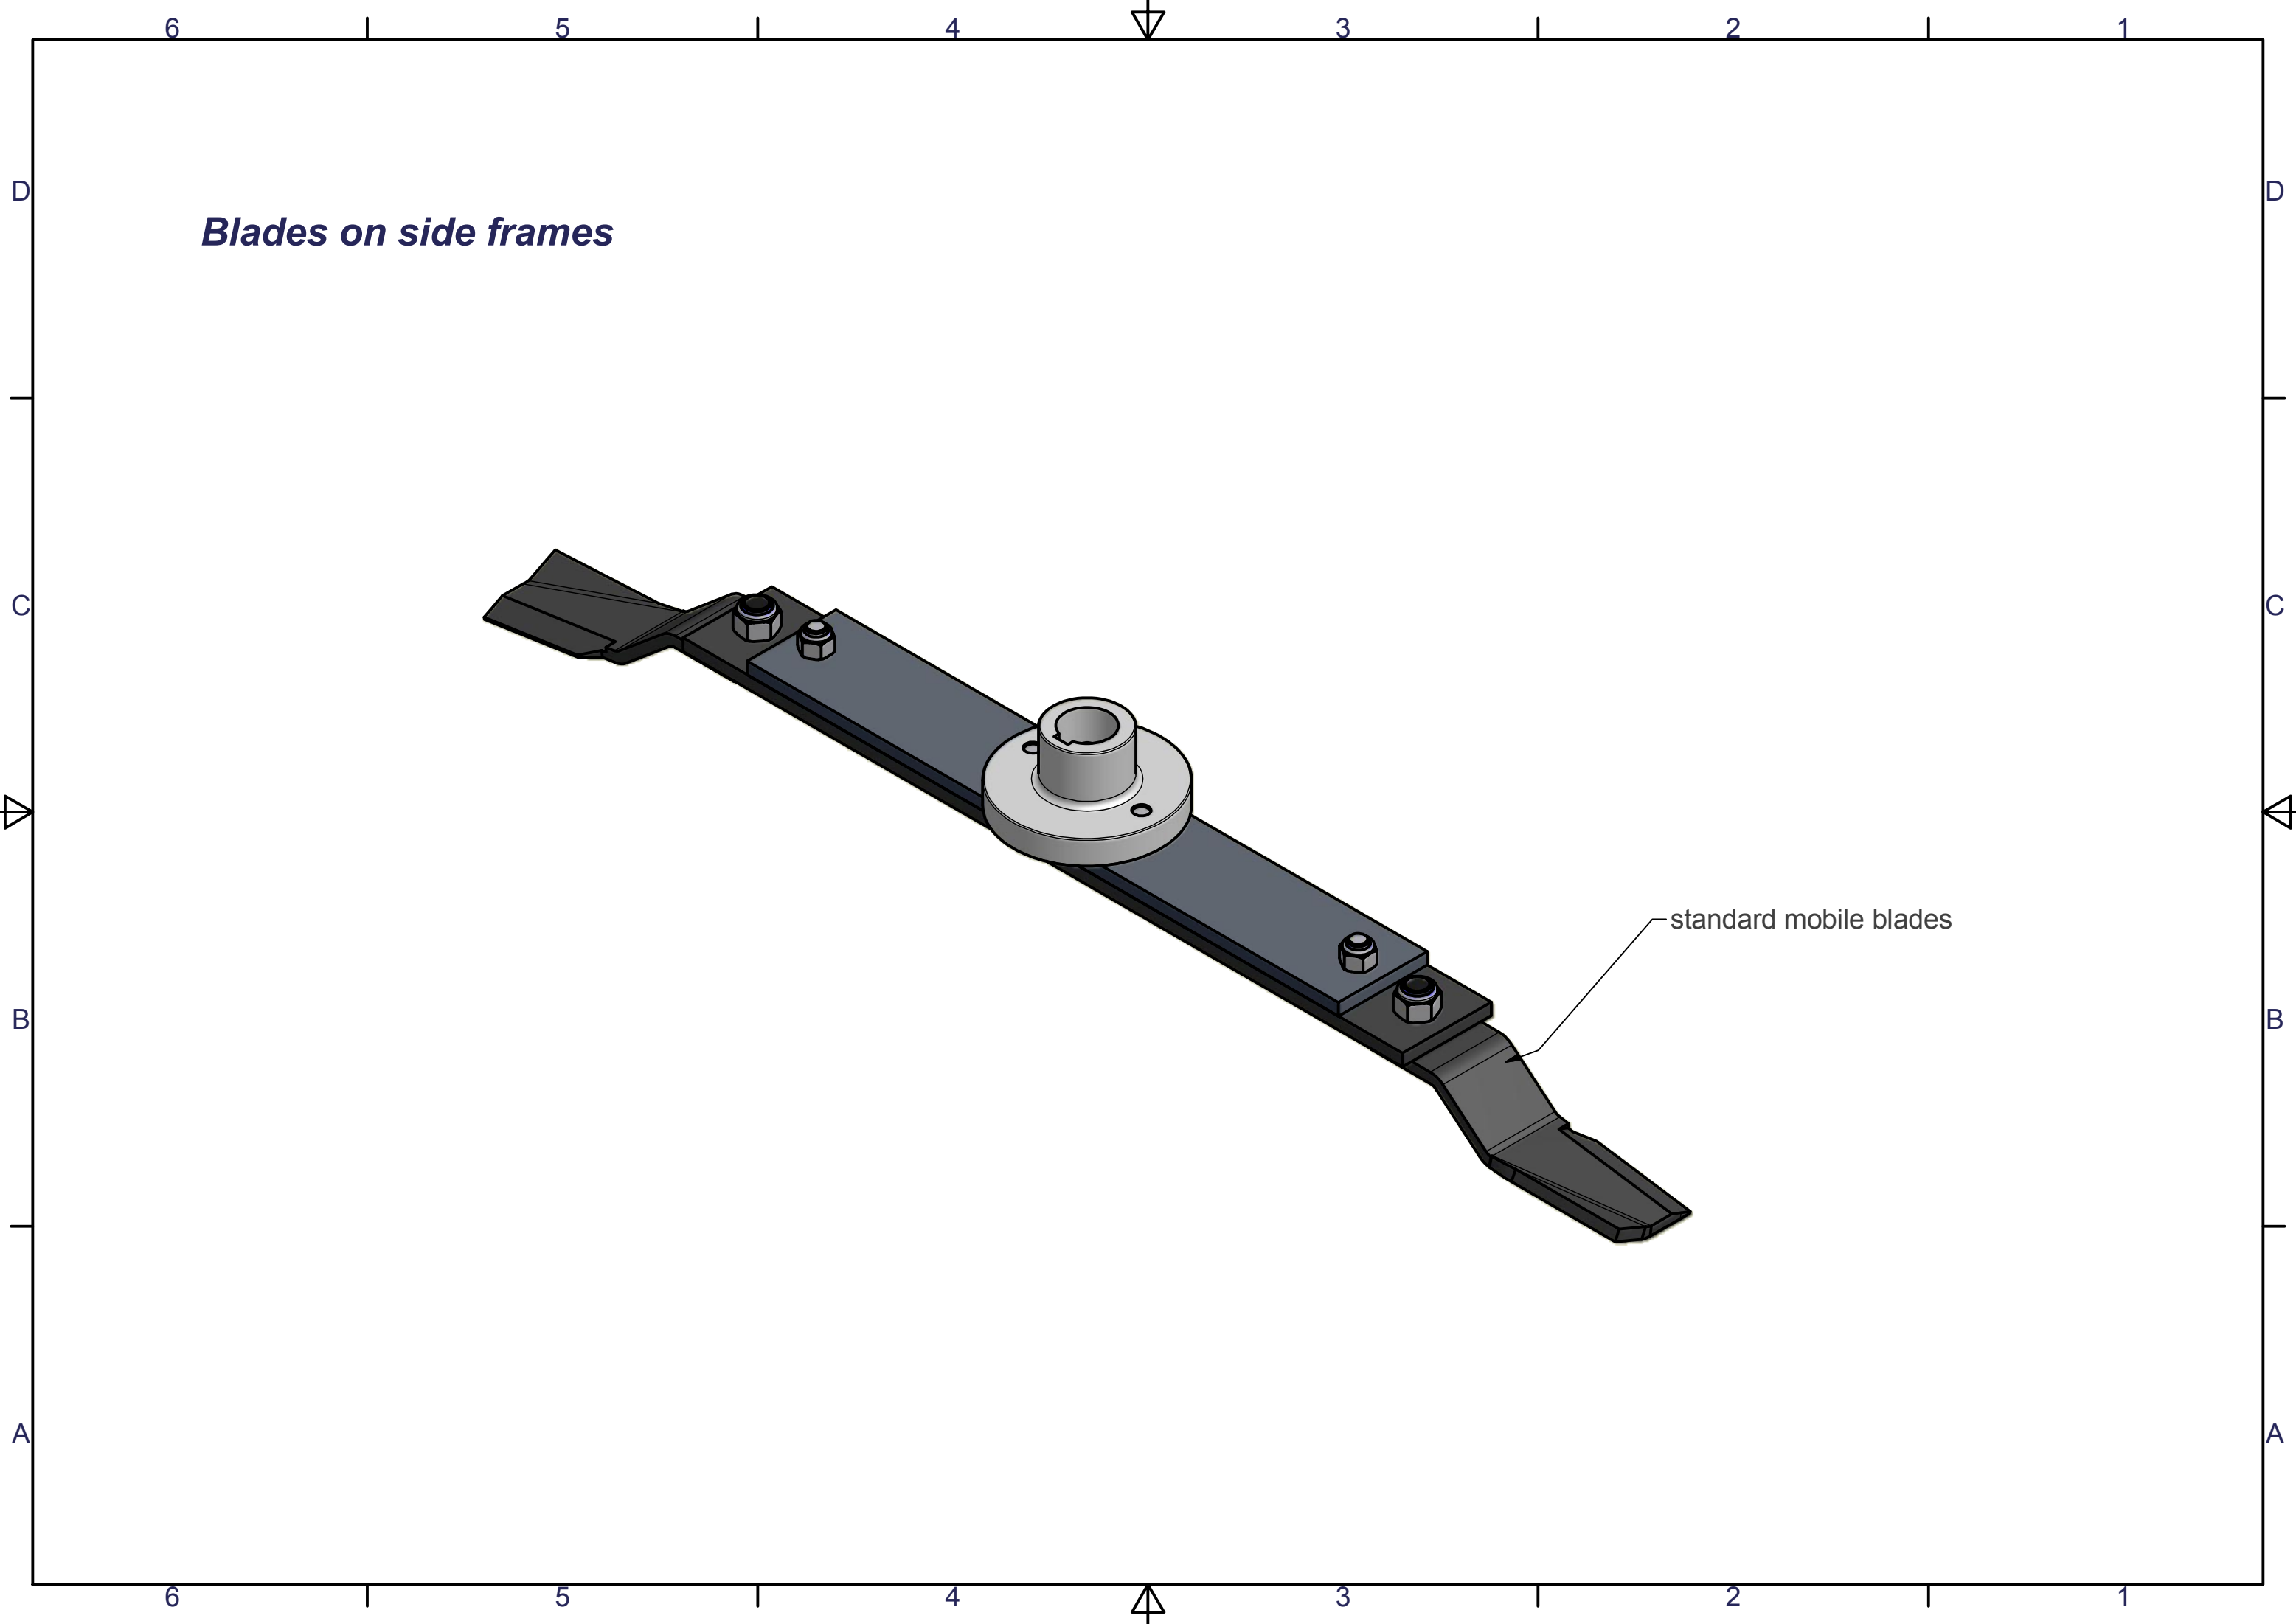

Rear roller and front wheels

Instead of the standard metal roller it's possible to mount:


- mobile rubber wheels
- fix rubber wheels

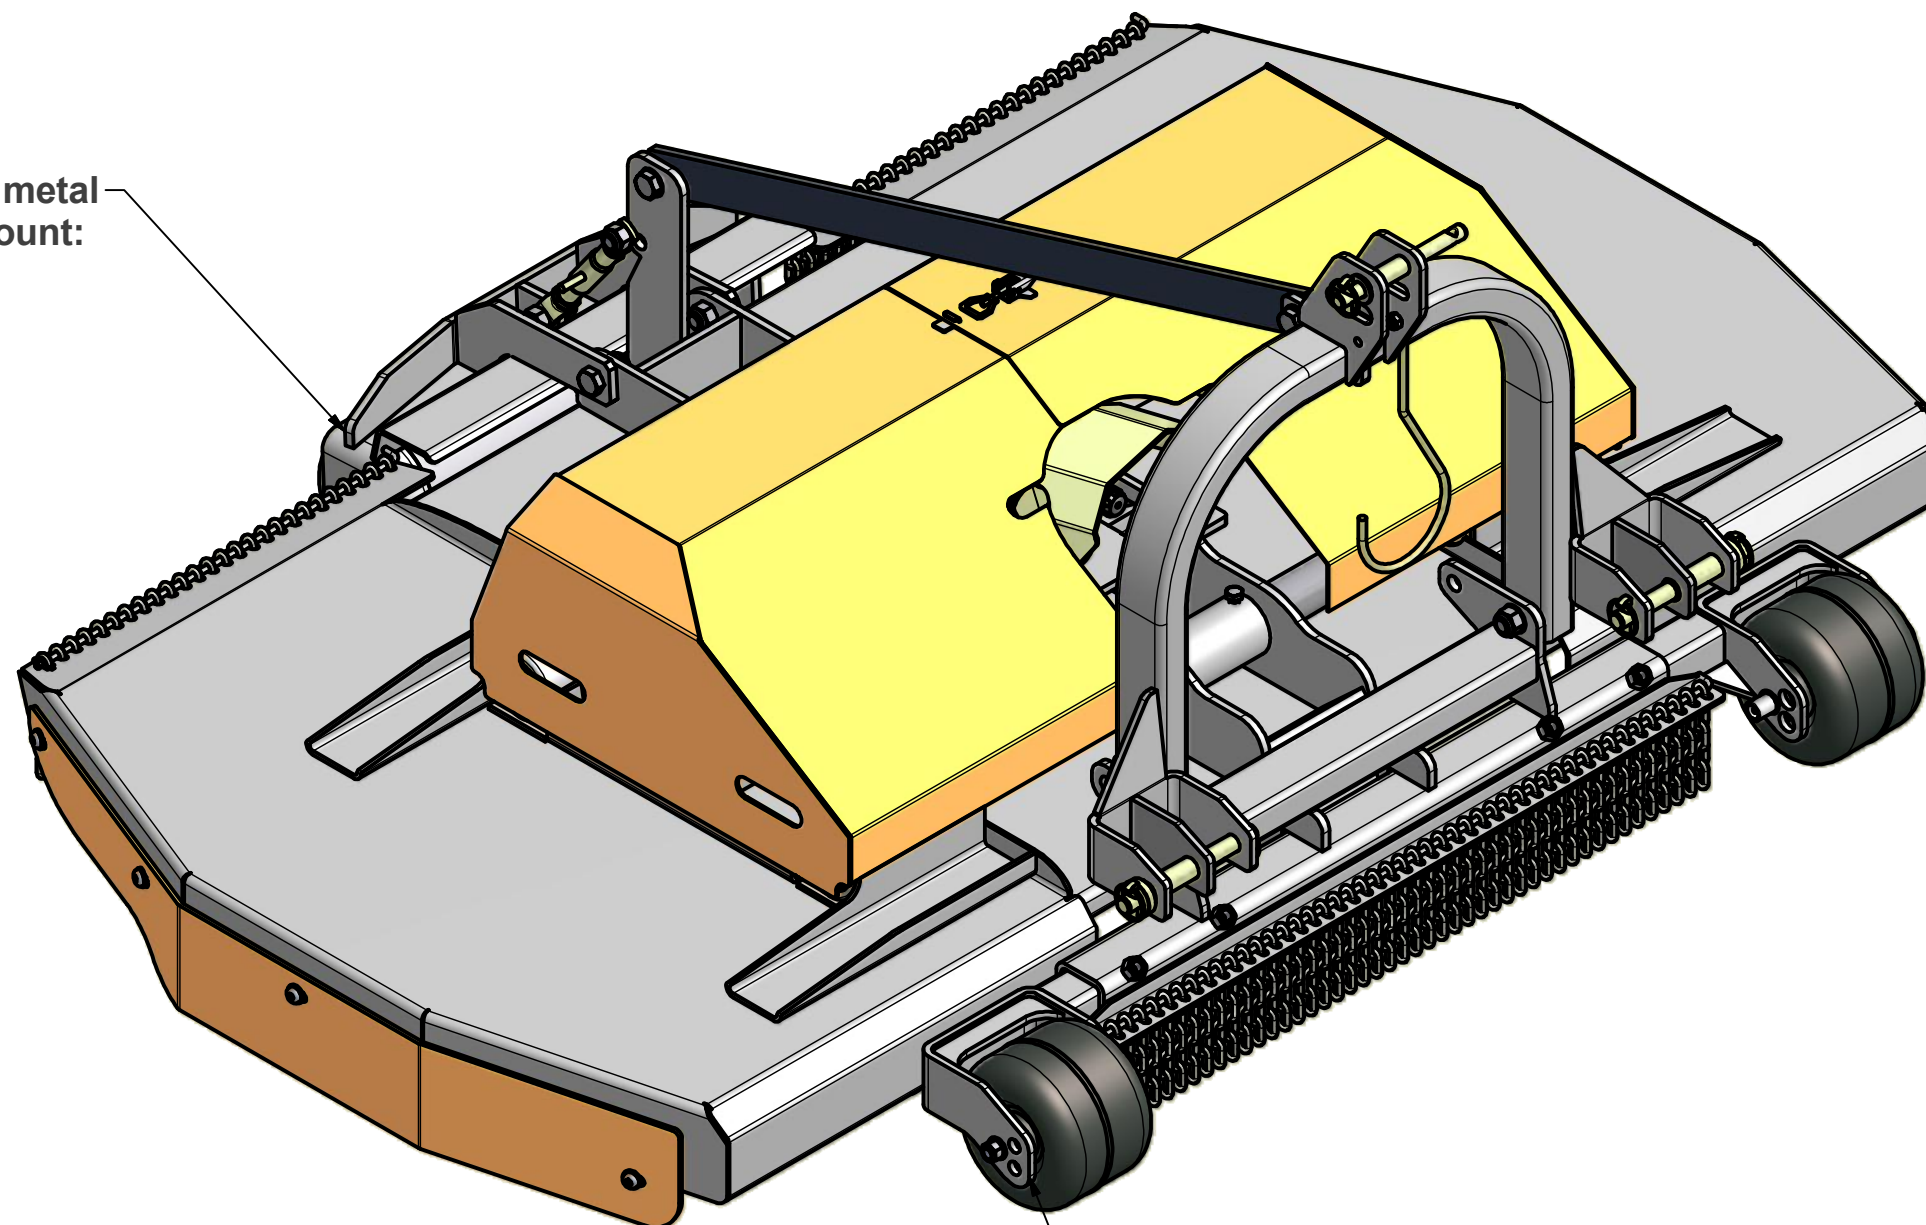

Instead of the fix standard metal wheels it's possible to mount:

- mobile metal wheels
- fix rubber wheels

Adjusting of cutting width by hyd. cylinders

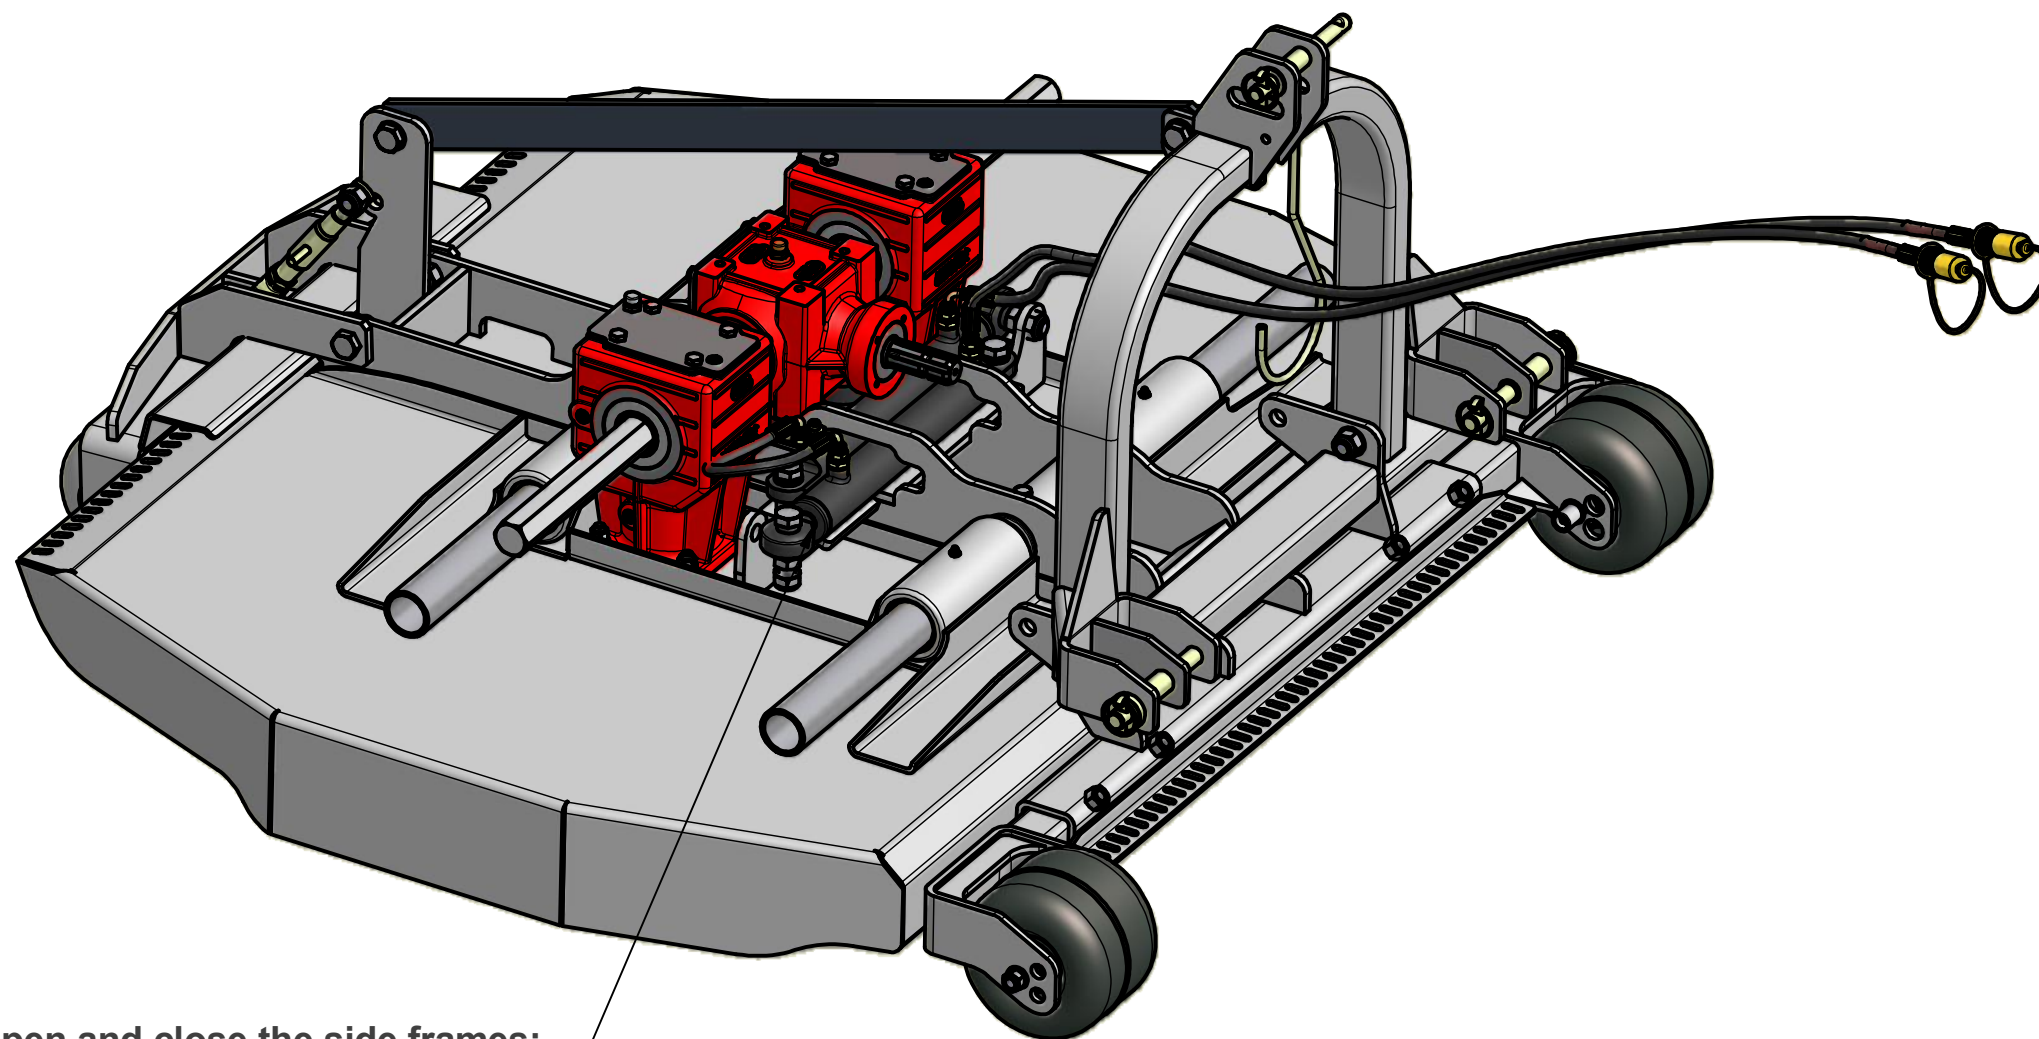


Two hydraulic cylinders onpen and close the side frames:


- **Standard:** *synchronous opening and closing of the side frames*
- **Optional:** *left and right side frame opens and closes separatly*

Types of ATTACHMENTS


REAR-mounting

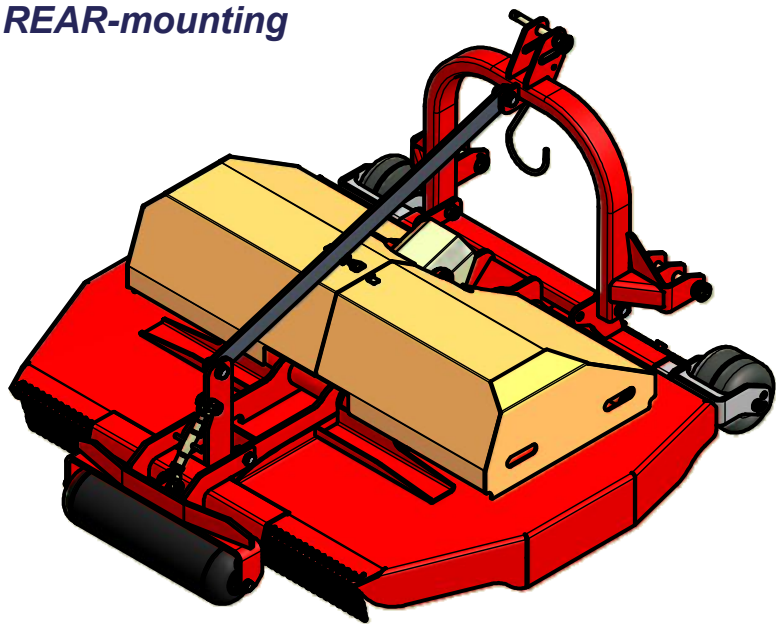


FRONT-REAR-mounting

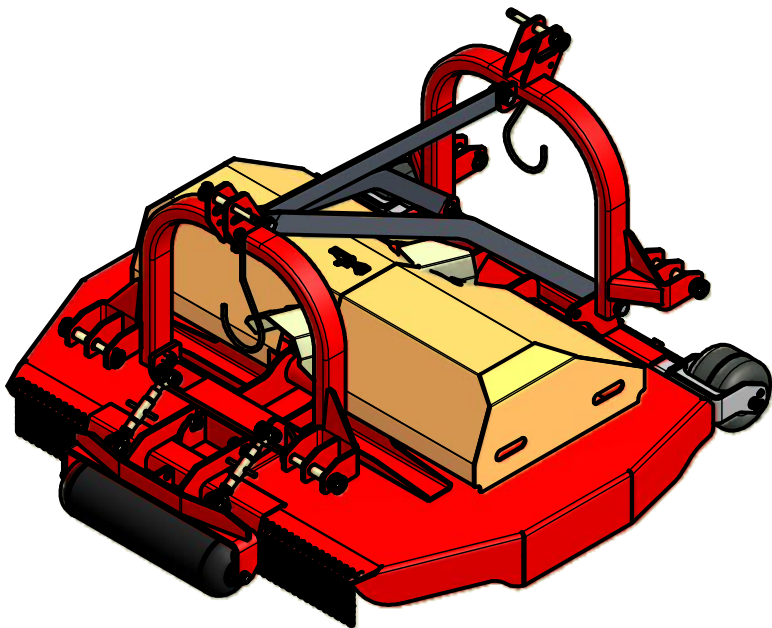

Mounting for spraying equipment

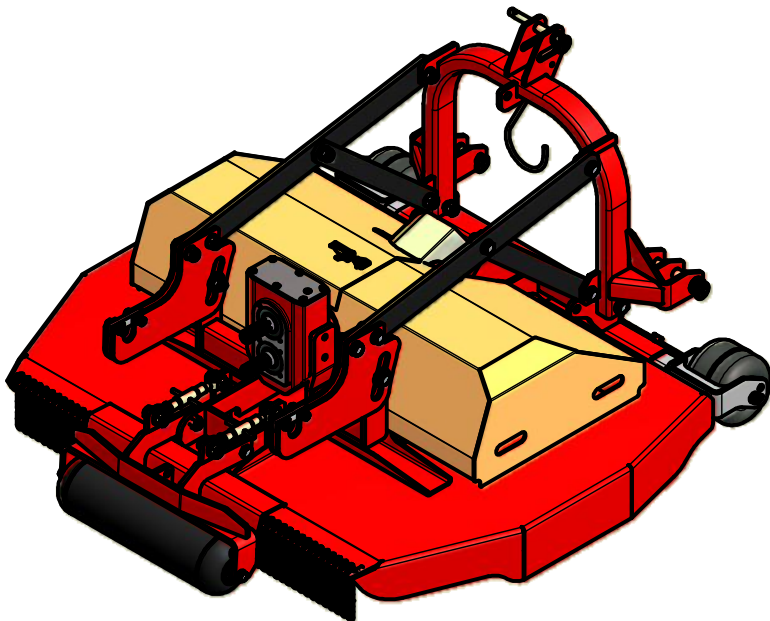

FRONT-mounting

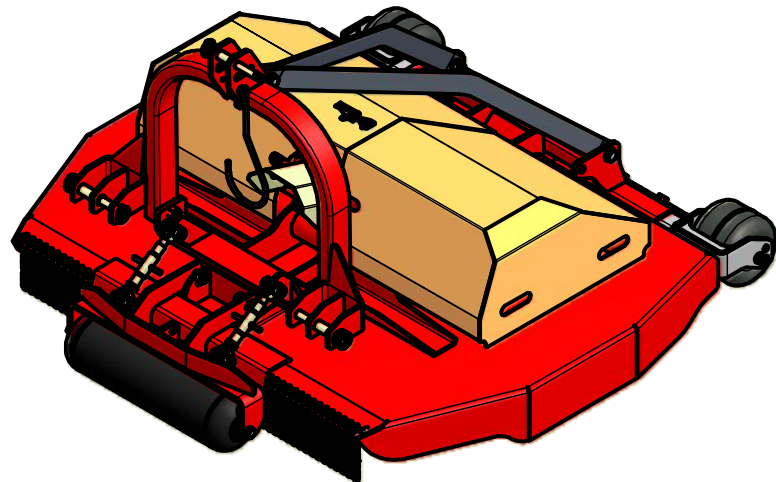

rear mounting with HYDRAULIC SIDE SHIFT

