



BV mit FEINTASTAUTOMATIK mit ELEKTROVENTIL

BV con TASTATORE idraulico bilaterale con ELETTRIVALVOLA

BV with HYD PRECISION SENSOR & ELECTRIC VALVE



Mod.											
			HP	KG	A	B	C	D	E	Min.	Max.
BV2 110-145	2	4	40 - 100	430	112	110	90	24	150	110	145
BV2 125-175	2	4	40 - 100	470	127	120	90	24	180	125	175
BV2 140-195	2	4	40 - 100	510	147	130	90	24	200	145	195
BV2 160-230	2	4	40 - 100	580	162	140	90	24	235	160	230
BV2 190-260	2	4	40 - 100	690	192	150	90	24	265	190	260
BV2 220-300	2	4	40 - 100	790	223	210	90	24	303	220	300






BV mit HYDRAULISCHER SCHWENKSCHIBE D400 mit FEINTASTER



BV con DISCHI INTERFILARI D400 con TASTATORE




BV with HYDRAULIC DISCS D400 with PRECISION SENSOR

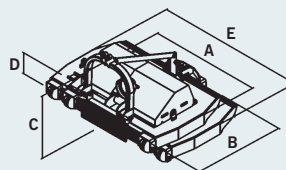Mod.												
			HP	KG	A	B	C	D	E	Min.	Max.	
BV2 110-145	2	4	40 - 100	430	112	110	90	24	150	110 +30 DX +30 SX	145 +30 DX +30 SX	-10° - +45°
BV2 125-175	2	4	40 - 100	470	127	120	90	24	180	125 +30 DX +30 SX	175 +30 DX +30 SX	-10° - +45°
BV2 140-195	2	4	40 - 100	510	147	130	90	24	200	145 +30 DX +30 SX	195 +30 DX +30 SX	-10° - +45°
BV2 160-230	2	4	40 - 100	580	162	140	90	24	235	160 +30 DX +30 SX	230 +30 DX +30 SX	-10° - +45°
BV2 190-260	2	4	40 - 100	690	192	150	90	24	265	190 +30 DX +30 SX	260 +30 DX +30 SX	-10° - +45°
BV2 220-300	2	4	40 - 100	790	223	210	90	24	303	220 +30 DX +30 SX	300 +30 DX +30 SX	-10° - +45°


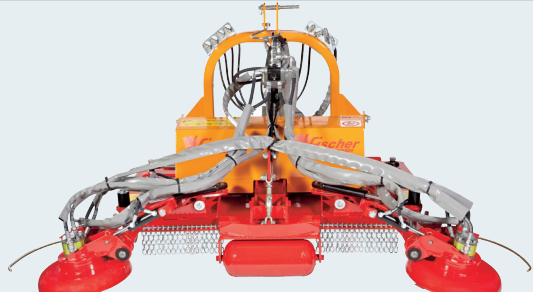
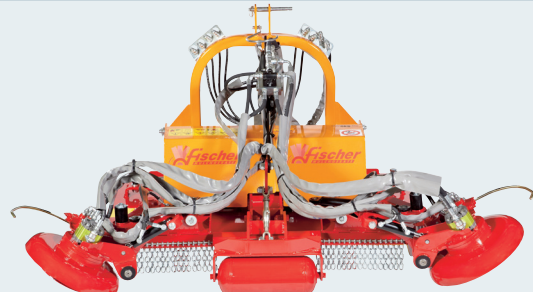



BV mit TWISTER W2 BV con TWISTER W2 BV with TWISTER W2

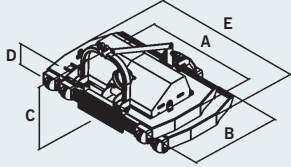Mod.					 Außenabmaße Ingombri esterni					 Schnittbreiten Larghezza di lavoro			
			HP	KG	A	B	C	D	E	Min.	Max.		
BV2 110-145	2	4	40 - 100	430	112	110	90	24	150	110 +20 DX +20 SX	145 +20 DX +20 SX	20 x 2	-6° - +75°
BV2 125-175	2	4	40 - 100	470	127	120	90	24	180	125 +20 DX +20 SX	175 +20 DX +20 SX	20 x 2	-6° - +75°
BV2 140-195	2	4	40 - 100	510	147	130	90	24	200	145 +20 DX +20 SX	195 +20 DX +20 SX	20 x 2	-6° - +75°
BV2 160-230	2	4	40 - 100	580	162	140	90	24	235	160 +20 DX +20 SX	230 +20 DX +20 SX	20 x 2	-6° - +75°
BV2 190-260	2	4	40 - 100	690	192	150	90	24	265	190 +20 DX +20 SX	260 +20 DX +20 SX	20 x 2	-6° - +75°
BV2 220-300	2	4	40 - 100	790	223	210	90	24	303	220 +20 DX +20 SX	300 +20 DX +20 SX	20 x 2	-6° - +75°

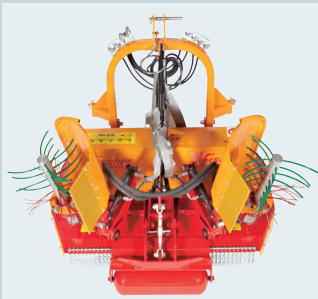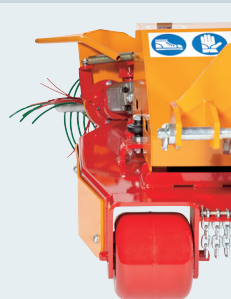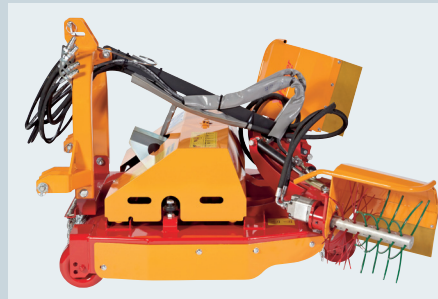

SLF mit HYDRAULISCHER SCHWENKSCHIBE D600 mit FEINTASTER SLF con DISCO INTERFILARE D600 con TASTATORE SLF with HYDRAULIC DISC D600 with PRECISION SENSOR

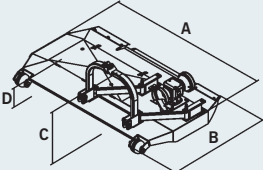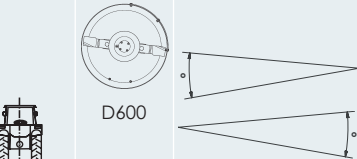Mod.					 Außenabmaße Ingombri esterni				 Schnittbreiten Larghezza di lavoro		 D600	
			HP	KG	A	B	C	D				
SLF 2 125	2	2	40 - 80	250	126	130	90	22	125	70 55 120	+50 DX	-10° - +45°
SLF 2 140	2	2	40 - 80	280	141	135	90	22	140	70 70 135	+50 DX	-10° - +45°
SLF 2 160	2	2	40 - 80	310	162	140	90	22	160	80 80 160	+50 DX	-10° - +45°
SLF 3 185	3	3	40 - 80	340	187	130	90	22	185	80 105 185	+50 DX	-10° - +45°
SLF 3 205	3	3	40 - 80	370	207	135	90	22	205	85 125 205	+50 DX	-10° - +45°
SLF 3 230	3	3	40 - 80	390	232	140	90	22	230	80 150 230	+50 DX	-10° - +45°

